






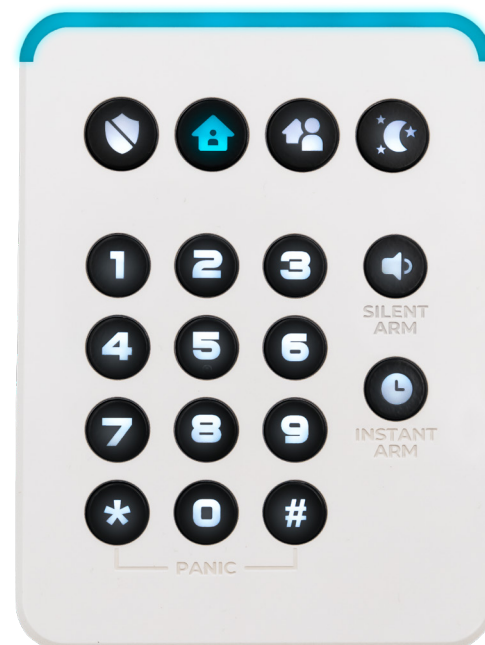


# LED Keypad

The new LED Keypad is an interface for all Connect+ systems. It can be mounted to the wall or placed on a table and uses backlit keys and an LED light bar to provide visual arming status. The LED Keypad can be battery operated or powered by existing AC.


## FEATURES:

-  DISPLAYS REAL-TIME STATUS
-  EASY-TO-READ LED KEYS
-  LIGHT BAR CONFIRMS ARMING STATUS
-  WALL OR TABLE MOUNT
-  AC POWERED, OR 1-YEAR BATTERY LIFE
-  USER REPLACEABLE AA BATTERIES
-  5-YEAR MANUFACTURER WARRANTY



SKU: RE663 LED KEYPAD



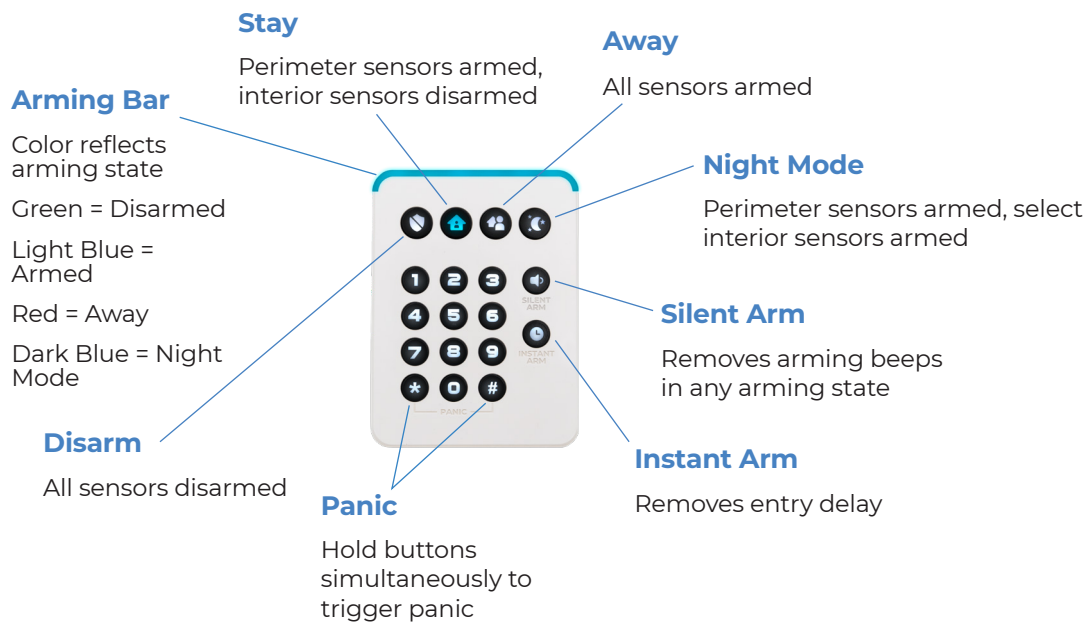

## TECHNICAL SPECIFICATIONS

<b>Physical</b>	
Wall Dimensions	3.81in [9.67cm] x 5.1in [12.94cm] x 1.55in [3.94cm] Deep
Table-Top Footprint	3.81in [9.67cm] x 5.47in [13.89cm] x 3.17in [8.05cm] High
Weight	1.0lb [454g]
Pilot Hole for Screw into Wood	Ø 1/8in [3mm]
Pilot Hole for Wall Anchor	Ø 3/16in [4.7mm]
Mounting Fasteners	#6 screws & 2 wall anchors (included)
<b>Device Specification</b>	
Frequency	2.4 GHz
Replacement Battery	4 Panasonic AA (Alkaline)
Nominal Battery Life	1 year (under typical use)
Battery Voltage	6.0 VDC (Nominal), TBD VDC (Low)
Current Draw	TBD (Maximum), 9uA (Quiescent)
Transmitted Indications	Low Battery, Tamper, Supervision
<b>Environmental</b>	
Operating Temperature	32°F to 120°F [0°C to 49°C]
Maximum Humidity	85% non-condensing relative humidity
<b>Accessories</b>	
No accessories needed	Connect+ has bluetooth built in, power supply included
<b>Certification</b>	
FCC	U5X-RE663
IC	8310A-RE663

Specifications subject to change without notice.